

SDVR-110443-ZC

32CH 5 IN 1 DIGITAL VIDEO RECORDER (2MP)



### Product Highlights

- 32CH 5 in 1 Metal Box DVR
- 2 MP Supported
- Supports Analogue/AHD/HDCVI/HDTVI/IP
- Supports 32CH BNC + 8CH IP
- Supports 4CH Audio
- Supports 4 SATA upto 24 TB
- Supports HDMI/VGA
- Supports Dropbox upload upto 2 GB
- 12V DC/2A with 60W Power Consumption




## Specifications

<b>Model Number</b>	<b>SDVR-110443-ZC</b>
<b>System</b>	
Video System	PAL/NTSC
Operating System	Linux ( Embedded )
<b>Video IN</b>	
No. of Channels	32ch BNC
No.of Analogue/ AHD /HDCVI / HDTV/ IP Input	31ch BNC + 8ch IP input
Video Resolution Live	1080P
Recording Speed	1080P:PAL:15fps(each ch),720P:PAL:25fps(each ch)/NTSC:30fps(each ch) 960H:PAL:25fps(each ch)/NTSC:30ps(each ch), IP:PAL:25fps(each ch)/NTSC:30fps(each ch)
<b>Audio In / Out</b>	
No. of Channels IN	4
No. of Channels OUT	1
<b>Display</b>	
Interface	1 HDMI, 1 VGA
Multi Screen Display	1/4/9/16
OSD Menu	Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording
<b>Recording</b>	
Compression	H.264
Resolution	Analog/AHD/HDCVI/HDTV : 1080N/720P/960H IP : 4MP/ 3MP/ 2MP/720P/960H
Bitrate	32~6144 Kbps
Frame Rate Live	25 fps @ 1080P
Frame Rate Playback	15fps @ 32ch
Incoming Bandwidth	32 Mbps
Outgoing Bandwidth	128Mbps
<b>Recording</b>	
Playback	Synchronous Playback
Search Mode	Time/Date, Alarm, Motion Detection and Exact Search
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen , Repeat, Shuffle, Backup Selection, Digital Zoom
<b>Video Detection &amp; Alarm</b>	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen Tips
Video Detection	Motion Detection, MD Zones : 396 ( 22 * 18 ) , Video Loss, Tampering & Diagnosis
<b>Storage</b>	
Internal HDD	4 SATA upto 24 TB
<b>Backup</b>	
USB	1 × 2.0, 1 × 3.0
<b>Network</b>	
Interface	1 RJ-45 ( 100M )
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, P2P, IP Search
Smart Phone	Android & iOS
Interoperability	ONVIF 2.42, CGI Conformant

## Specifications

<b>Auxilliary Interface</b>	
RS232	Yes
RS485	Yes
<b>Electrical</b>	
Power Supply	12V DC / 5A
Power Consumption	60 Watts
<b>Enviromental</b>	
Operating Temperature	-10°C - 50°C and 90% humidity or less than that
Storage Temperature	Below 40°C
<b>Construction</b>	
Dimensions	378 x 326 x 66mm
<b>Included Accessories</b>	Power Supply, Mouse, Remote Control, HDD Connectors, Software CD, User Manual
<b>Certifications</b>	CE, FCC, UL & RoHS

## Dimensions

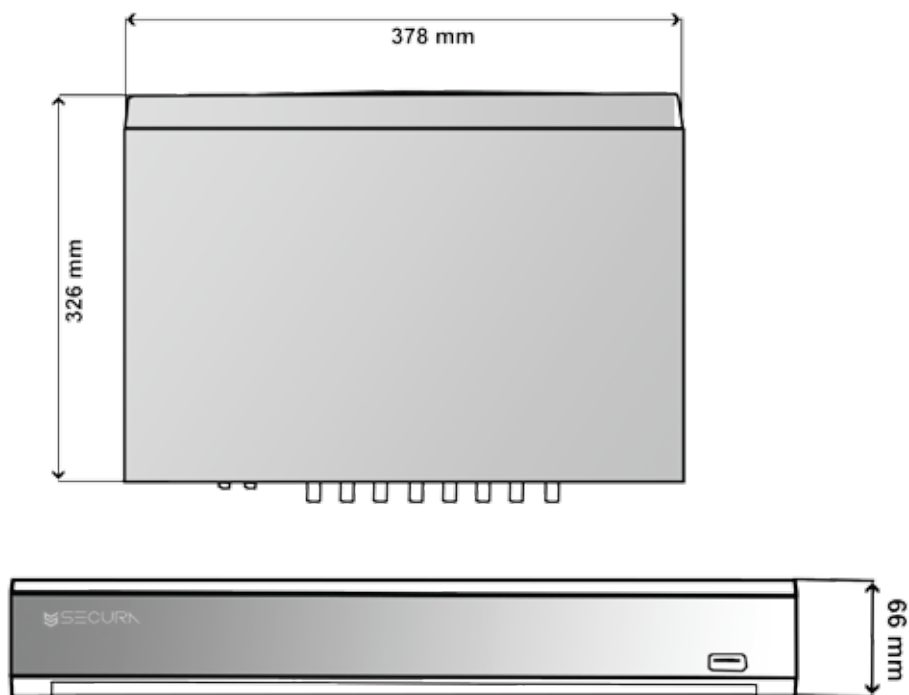

## Rear Panel

