

SDVR-120343-ZB

16CH 5 IN 1 DIGITAL VIDEO RECORDER (5MP)



Product Highlights

- 16CH 5 in 1 Metal Box DVR
- 5 MP Supported
- Supports Analogue/AHD/HDCVI/HDTVI/IP
- Supports 16CH BNC + 8CH IP
- Supports 4CH Audio
- Supports 2 SATA upto 12 TB
- Supports HDMI/VGA
- Supports Dropbox upload upto 2 GB
- 12V DC/2A with 60W Power Consumption




Specifications

Model Number	SDVR-120343-ZB
System	
Video System	PAL/NTSC
Operating System	Linux (Embedded)
Video IN	
No. of Channels	16ch BNC
No.of Analogue/ AHD /HDCVI / HDTVI/ IP Input	16ch BNC + 8ch IP input
Video Resolution Live	5 Mega Pixel
Recording Speed	960 * 1080 @ 15 fps each ch, 720 @ 15 fps each ch, 960H @ 30 fps each ch
Audio In / Out	
No. of Channels IN	4
No. of Channels OUT	1
Display	
Interface	1 HDMI, 1 VGA
Multi Screen Display	01/4/8/16
OSD Menu	Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording
Recording	
Compression	H.264
Resolution	Analog/AHD/HDCVI/HDTVI : 1080N/720P/960H IP : 4MP/ 3MP/ 2MP/720P/960H
Record Rate	Analog :4MP:15fps(each ch) 3MP:20fps(each ch) 1080P:PAL:25fps(each ch)/NTSC:30fps(each ch) 720P:PAL:25fps(each ch)/NTSC:30fps(each ch) 960H:PAL:25fps(each ch)/NTSC:30ps(each ch) IP:PAL:25fps(each ch)/NTSC: 30fps(each ch)
Bitrate	32~8192 Kbps
Frame Rate Live	25fps@4MP, 20fps@5MP
Frame Rate Playback	15fps@4MP, 10fps@5MP
Incoming Bandwidth	64 Mbps
Outgoing Bandwidth	128 Mbps
Recording	
Playback	Synchronous Playback
Search Mode	Time/Date, Alarm, Motion Detection and Exact Search
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen , Repeat, Shuffle, Backup Selection, Digital Zoom
Video Detection & Alarm	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen Tips
Video Detection	Motion Detection, MD Zones : 396 (22 * 18) , Video Loss, Tampering & Diagnosis
Storage	
Internal HDD	1 SATA upto 6 TB
Backup	
USB	1 × 2.0, 1 × 3.0

Specifications

Network	
Interface	1 RJ-45 (100M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, P2P, IP Search
Smart Phone	Android & iOS
Interoperability	ONVIF 2.42, CGI Conformant
Auxilliary Interface	
RS232	Yes
RS485	Yes
Electrical	
Power Supply	12V DC / 5A
Power Consumption	60 Watts
Enviromental	
Operating Temperature	-10°C - 50°C and 90% humidity or less than that
Storage Temperature	Below 40°C
Construction	
Dimensions	378 × 384 × 50mm
Included Accessories	Power Supply, Mouse, Remote Control, HDD Connectors, Software CD, User Manual
Certifications	CE, FCC, UL & RoHS

Dimensions

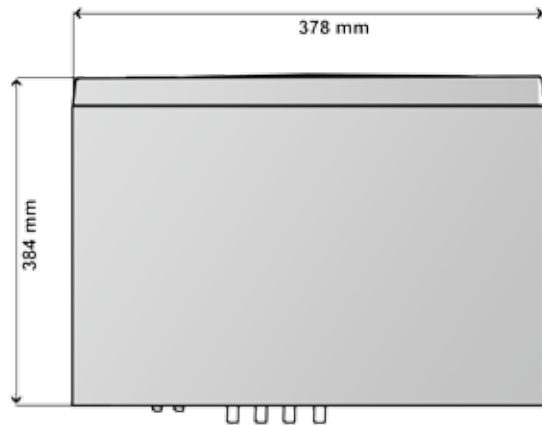

Rear Panel

