

## 2MP Network IR Bullet Camera

Model No – SIP-CB203S



### Key Features

#### Optics

- Day/night functionality
- IR anti-reflection window to increase the infrared transmittance
- 3D DNR (Digital Noise Reduction)
- Smart IR, up to 50m IR distance

#### Compression

- H.265, H.264, MJPEG
- Triple streams
- 9:16 corridor mode
- Embedded smart algorithm

#### Network

- ONVIF conformance

#### Structure

- Wide temperature range:-30°C to 60°C
- Wide voltage range of  $\pm 25\%$
- IP67


## Specification

<b>Model No</b>	SIP-CB203S	Version 5.1
<b>Camera</b>		
Sensor	1/ 2.8", megapixel, progressive scan CMOS	
Shutter	1 / 25 s ~ 1 / 100000 s	
Lens	2.8~12mm	
Min. Illumination	0.0038 lux@F1.4,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR	
Day/Night	IR-cut filter with auto switch (ICR)	
S/N	>55dB	
IR Range	Up to 50m	
Noise Reduction	2D/3D	
WDR	120 dB	
<b>Video</b>		
Max. Resolution	1920× 1080	
Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG	
Frame Rate	25 FPS	
Video Streaming	Triple	
<b>Audio</b>		
Audio Compression	G711A / U	
Audio I/O	1/1	
<b>Network</b>		
Protocols	IPv4/IPv6, ARP, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPnP, SIP, SNMP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL	
Compatible Integration	ONVIF, API	
<b>Storage</b>		
SD card	Supports storage Micro SD Upto 128 GB	
<b>Interface</b>		
Network	1 RJ45 10M/100M Base-TX Ethernet	
Security	Password protection, IP address filtering, HTTPS (SSL) login authentication, Digest login authentication, User access log, 802.1x authentications	
Alarm I/O	1/1	
Streaming Method	Unicast, Multicast	
ONVIF Conformation	Supported	
Web Viewer		
i. Supported OS	latest Windows / Mac OS	
ii. Supported Browser	Latest version of Microsoft Internet Explorer available with Win 10 or latest win O.S., Firefox, Chrome, Safari	
<b>General</b>		
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: <12W	
Dimensions (mm)	279.5 × 100.3 × 88.9	
Weight	1.04Kg	

Working Environment	-30°C ~ +60°C, Humidity ≤ 95% RH (non-condensing)
Housing	Vandal-proof IK10-rated Metal Housing / Up to IP67-rated for Weather-resistant Performance
Certifications	CE, FCC, RoHS, UL, BIS

Note: The model numbers/Dimensions/Appearance are subject to change due to up gradation /version variations.

## Dimensions

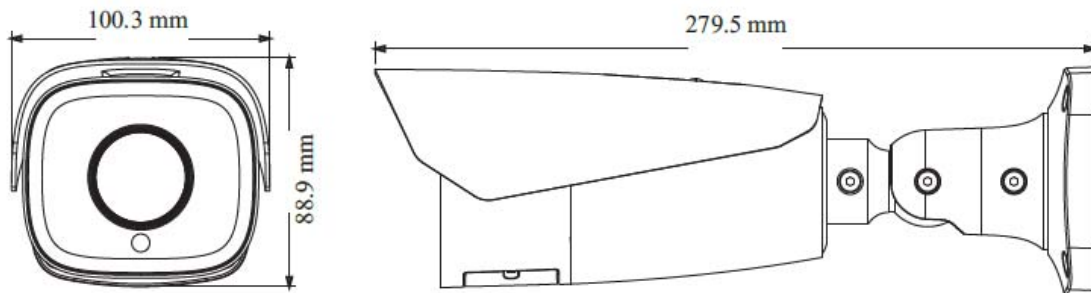

Lookman Electroplast Industries Ltd,

Old No-9, New No-15, 2<sup>nd</sup> Street Extn, 3<sup>rd</sup> Main Road, CIT Nagar, Nandanam,  
Chennai, Tamil Nadu - 600035, India P h : - 044 6622 2222.